

# Connection Settings Guide

Thank you for applying for Asahi Net WiMAX 2+ Service.

To start using L02, please configure connection settings following the steps ①-③ shown below.

## ① Insert au IC card to the router

Referring to *Preparation* in the *Quick Start Guide*, insert au IC card to the router.

\* The *Quick Start Guide* included in the box is in Japanese.

The English *Quick Start Guide* is available in the following webpage.

<https://asahi-net.jp/en/support/guide/mobile/wimax2plus/>



## ② Connect to Wi-Fi

Referring to *Connecting by using Wi-Fi setting copy feature* or *Connecting by manual setting* in the *Quick Start Guide*, connect your devices (smartphones, computers, etc.) and the router with Wi-Fi.



## ③ Turn on the router and configure APN settings

Referring to the *Steps to Configure APN Settings* on the reverse side of the page, configure APN settings.

**\* Please configure APN settings before you start using the router.**

**Proceed to the reverse side of the page**


**Settings completed**

# Steps to Configure APN Settings

\* Please configure APN settings before you start using the router

## STEP 1

Open the browser on your device and enter **192.168.100.1** in the address bar, then press the [Enter] key.





Alternatively, access by QR code.


<http://speedwifi.home>



To switch to English display, select *English* under *Language* in the *Login* window.




## STEP 2

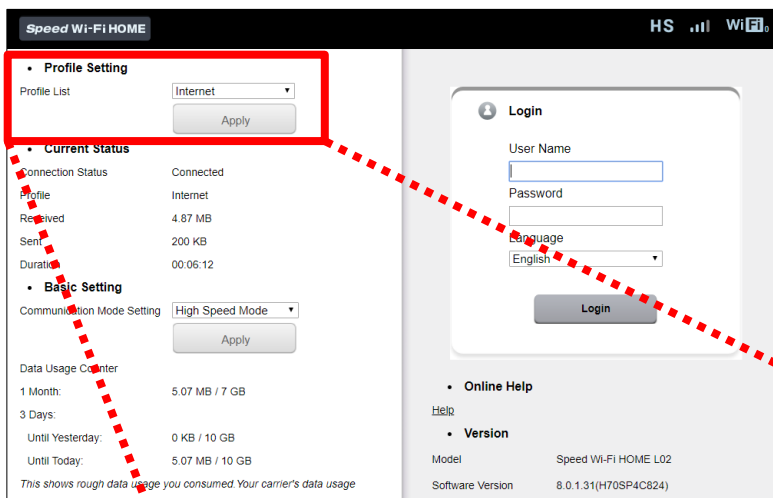

At the left top of the login screen you will see, *Profile List* under *Profile Setting*. Select *AN01*\* (①) and then click the *Apply* (②) button.

\* If you are using a fixed IP address, select *AN02*.

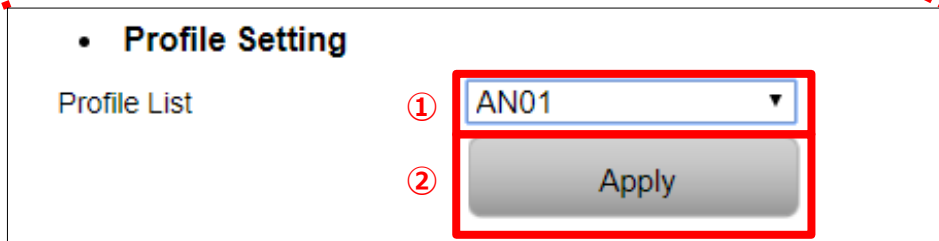

**Settings are completed.**



If you have any questions, please contact us below:

**Asahi Net English Customer Support**

 **0120-577-135**

Open hours: 10 a.m-5 p.m., Monday to Friday, excluding national holidays.